




General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

Cleaning & Packing

- For Cleaning Metal, Plex, & Laminate Parts: Use a MILD NON-ABRASIVE cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure. Heat and UV exposure will warp and fade components.
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

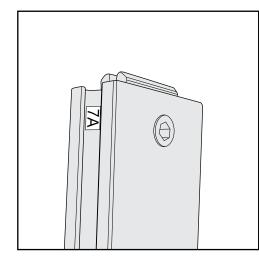

Part Identification - Numbering

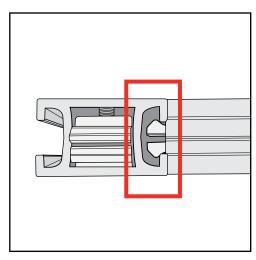

Engaged Lock

Disassembly

- For loss prevention, keep all knobs & connectors attached to extrusions during disassembly.





DO NOT USE POWER TOOLS





ALL CONNECTIONS MUST BE TIGHTLY SECURED

Straight Connection

When assembling frame, first attach all straight connectors, then attach corner connectors.

- 1) Place extrusions end-to-end.
- 2) Loosen all knobs, then slide straight connector across the seam of extrusions.
- 3) Tighten all knobs to secure connection.

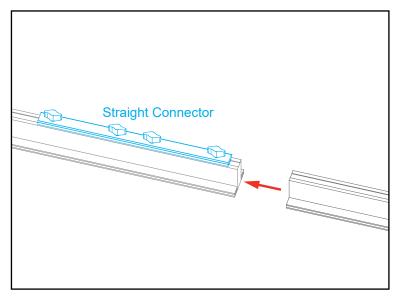

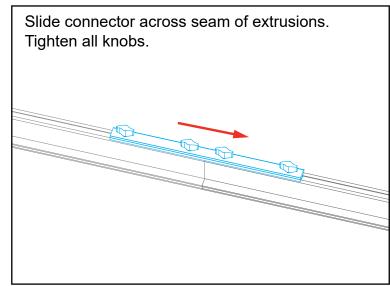

All knobs must be tightened securely to ensure a proper connection.

Disassembly

- 1) Loosen all knobs.
- 2) Slide connectors off of one extrusion.
- 3) Tighten knobs to prevent loss during packing & shipping.


Keep straight connectors in groove of extrusion. Do not remove connectors during disassembly.

Corner Connection

- 1) Loosen knobs, then slide vertical extrusions onto corner connectors of lower horizontal extrusion.
- 2) Slide corner connectors of **upper** horizontal extrusion into grooves of vertical extrusions.
- 3) Tighten all knobs to secure connection.

Disassembly

- 1) Loosen knobs on vertical extrusions.
- 2) Slide the vertical extrusions off of corner connectors on lower and upper horizontal extrusions.

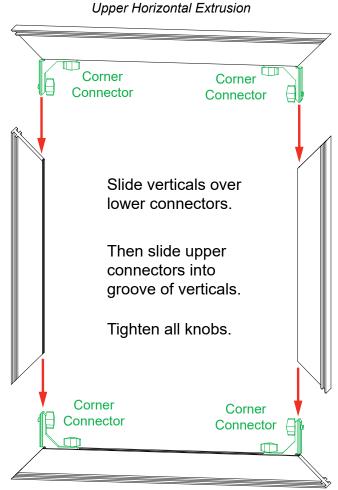









Adjust connectors if necessary to prevent gaps in connection.

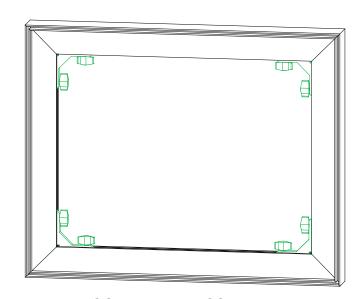


COMPLETED ASSEMBLY




All knobs must be tightened securely to ensure a proper connection.


Top View of Each Level

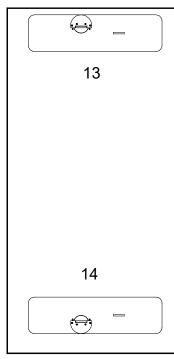


© 2023



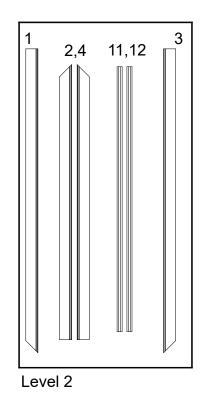


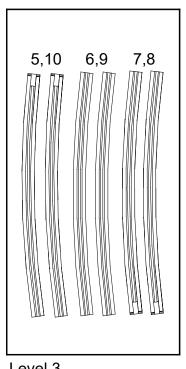




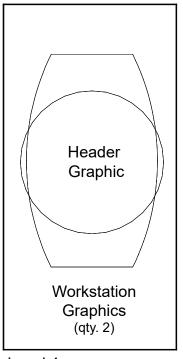




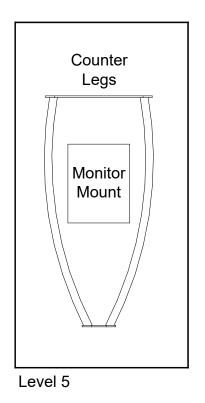


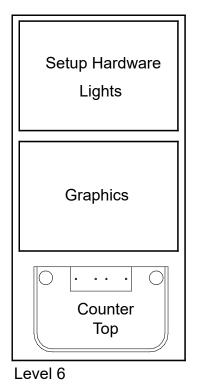


Top View of Each Level

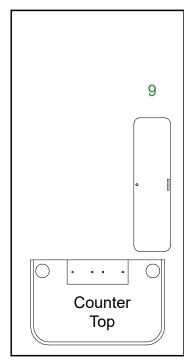


Level 1 (Bottom level)

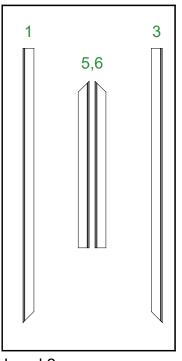

Level 2

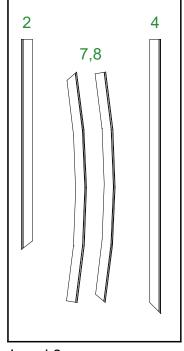

Level 3

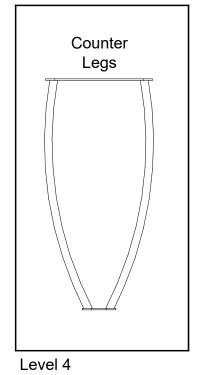





Graphics

SYMPHONY


Top View of Each Level

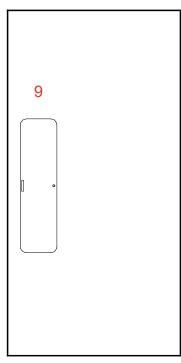

Level 1 (Bottom level)

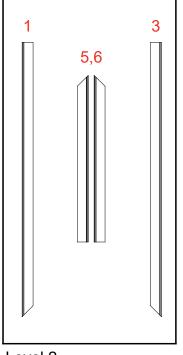


Level 2

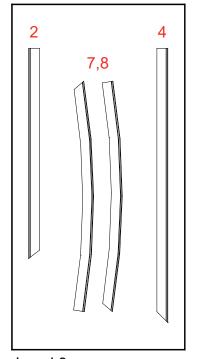


Level 3

Graphics


Top View of Each Level

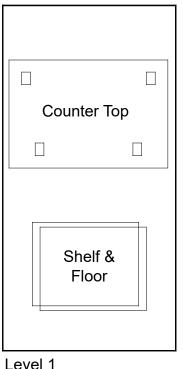


Level 1 (Bottom level)

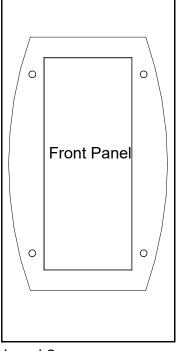

Level 2

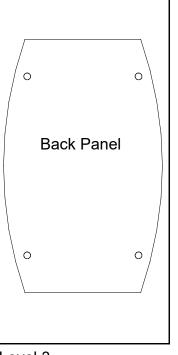

Level 3

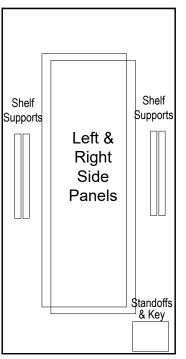



Level 4

SYI		4	
Portab	le Dis	play El	egance

Item	Qty.	Description
1	1	45"h TSP49 Vertical Extrusion
2	1	41"h TSP49 Vertical Extrusion
3	1	45"h TSP49 Vertical Extrusion
4	1	41"h TSP49 Vertical Extrusion
5	1	36.166"w TSP49 curved Horizontal Extrusion
6	1	36.166"w TSP49 curved Horizontal Extrusion
7	1	36.166"w TSP49 curved Horizontal Extrusion
8	1	36.166"w TSP49 curved Horizontal Extrusion
9	1	36.166"w TSP49 curved Horizontal Extrusion
10	1	36.166"w TSP49 curved Horizontal Extrusion
11	1	45.209"h Z45 Vertical Extrusion
12	1	37.209"h Z45 Vertical Extrusion
13	1	6" x 22" Base Plate w/ flange (left)
14	1	6" x 22" Base Plate w/ flange (right)

Assemble frame flat on ground.







Steps:

Refer to the Tool-less Frame Assembly general information page.


- 1) Assemble vertical extrusions [1-2], [3-4], [11-12] & horizontals [5-6-7], [8-9-10] together, using Tool-less Spline Connectors labeled [X] & [Z].
- 2) Connect vertical assemblies [1/2], [3/4] between horizontal assemblies [5/6/7], [8/9/10], using Tool-less Corner Connectors labeled [A].
- 3) Install Base Plates [13] & [14] to bottom corners of frame assembly as shown. See Base Plate Attachment detail.
- 4) Lift frame to upright position, then connect vertical assembly [11/12] between horizontal assemblies [5/6/7], [8/9/10] using Connection Lock w/ Knob.

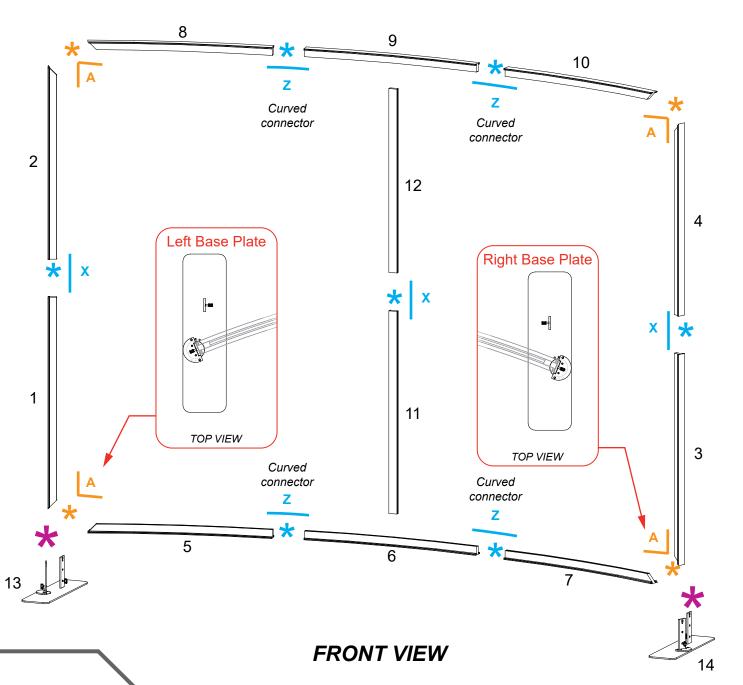



When assembled






tem	Qty.	Description
1	1	45"h TSP49 Vertical Extrusion
2	1	31.305"h TSP49 Vertical Extrusion
3	1	45"h TSP49 Vertical Extrusion
4	1	45"h TSP49 Vertical Extrusion
5	1	27.35"w TSP49 Horizontal Extrusion
6	1	27.35"w TSP49 Horizontal Extrusion
7	1	28.514"w TSP49 curved Horizontal Extrusion
8	1	28.514"w TSP49 curved Horizontal Extrusion
9	1	6" x 22" End Base Plate w/ foot

Steps:


Refer to the Tool-less Frame Assembly general information page.


- 1) Assemble vertical extrusions [1-2], [3-4] & horizontal extrusions [5-6], [7-8] together, using Tool-less Spline connectors labeled [X] & [Y].
- 2) Connect vertical assemblies [1/2], [3/4] between horizontal assemblies [5/6], [7/8], using Tool-less Corner Connectors labeled [A] & [B].
- 3) Install Base Plate [9] to bottom corners of frame assembly as shown. See Base Plate Attachment detail.





When assembled

Assemble frame flat on ground.





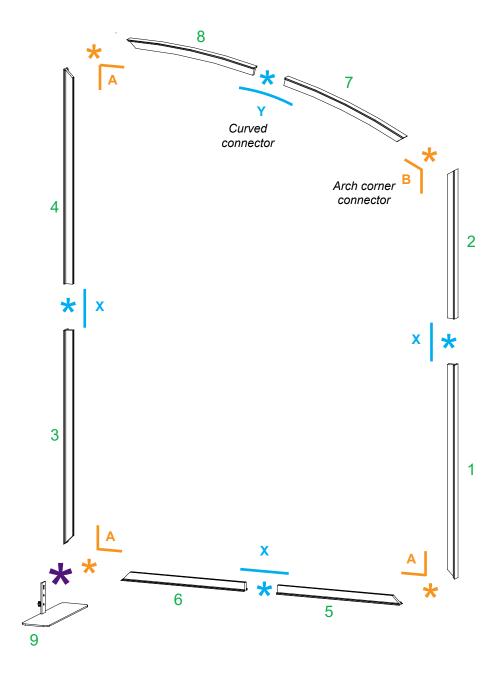



FRONT VIEW


Order #XXXXX Right Backwall Frame Assembly

tem	Qty.	Description
1	1	45"h TSP49 Vertical Extrusion
2	1	31.305"h TSP49 Vertical Extrusion
3	1	45"h TSP49 Vertical Extrusion
4	1	45"h TSP49 Vertical Extrusion
5	1	27.35"w TSP49 Horizontal Extrusion
6	1	27.35"w TSP49 Horizontal Extrusion
7	1	28.514"w TSP49 curved Horizontal Extrusion
8	1	28.514"w TSP49 curved Horizontal Extrusion
9	1	6" x 22" End Base Plate w/ foot

Steps:


Refer to the Tool-less Frame Assembly general information page.


- 1) Assemble vertical extrusions [1-2], [3-4] & horizontal extrusions [5-6], [7-8] together, using Tool-less Spline connectors labeled [X] & [Y].
- 2) Connect vertical assemblies [1/2], [3/4] between horizontal assemblies [5/6], [7/8], using Tool-less Corner Connectors labeled [A] & [B].
- 3) Install Base Plate [9] to bottom corners of frame assembly as shown. See Base Plate Attachment detail.





When assembled

Assemble frame flat on ground.





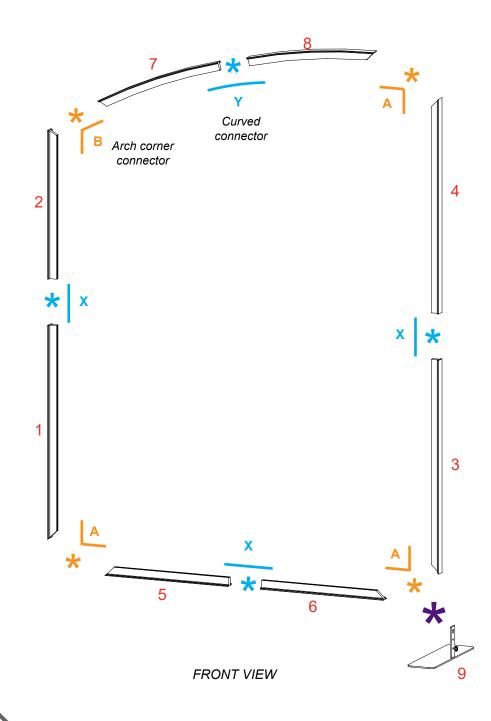




Order #XXXXX Backwall Frames Connection

* Base Plate Attachment


Place key hole over bolt on panel & slide down.

© 2023




Steps:


- 1) Connect vertical of Left Frame Assembly to Base Plate of Middle Frame Assembly. See Base Plate Attachment detail.
- 2) Attach vertical of Right Frame Assembly to Base Plate of Middle Frame Assembly. See Base Plate Connection detail.

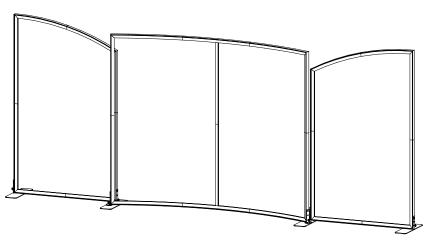

When assembled

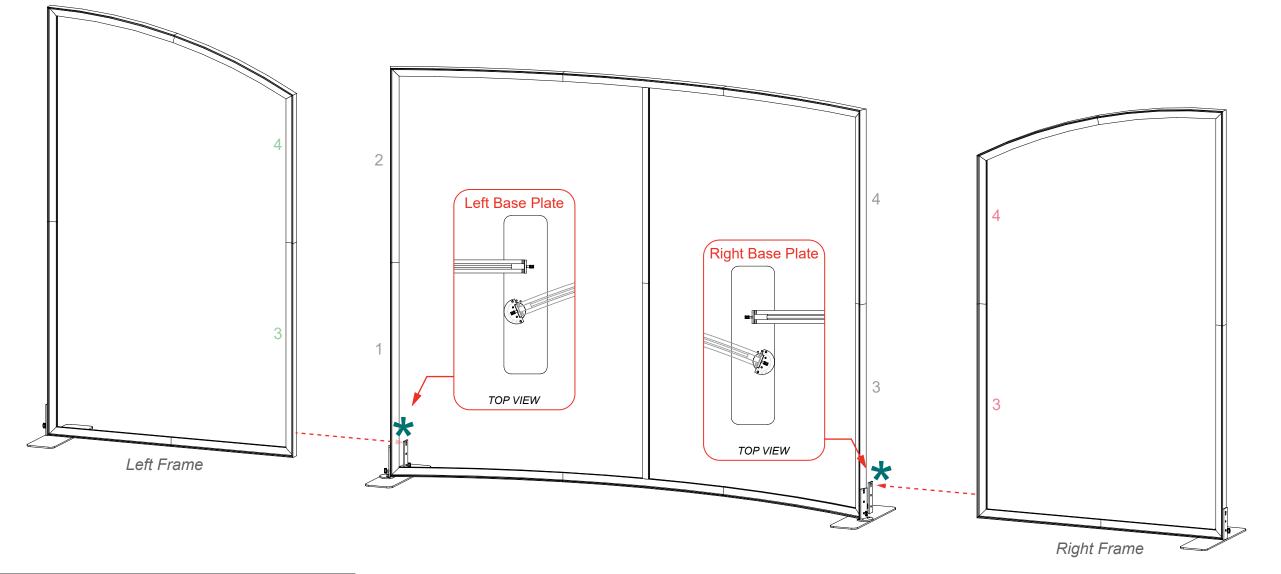

SEG Graphic Installation



It is important to first insert graphic into each alternate corner, then to the sides of the frame. If this is not done, graphic will not fit into the frame correctly.



© 2023

Step 1 Insert corner A. Turn edge of graphic so silicon welt is perpendicular to face of graphic. Insert narrow side of welt with fabric to outside into the channel. Repeat for other side of this corner.



Step 2 Repeat Step 1 for opposite corner C, then insert corner B, followed by corner D, to complete the installation of the corners.



Step 3 Once all corners are inserted, press one silicon edge into channel from corners and work toward the center. Make sure welt is fully inserted into channel. Continue until all sides are done. Smooth out edges of graphic.




Graphic Removal


To remove the graphic from the frame, locate the fabric pull tab. Gently pull up on the tab to remove the fabric.

Steps:

1) Apply SEG Graphics to assembled frames.

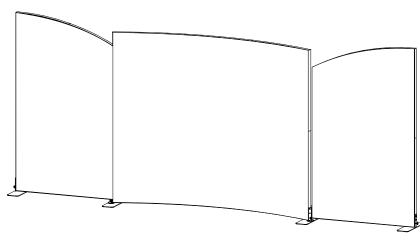

When assembled

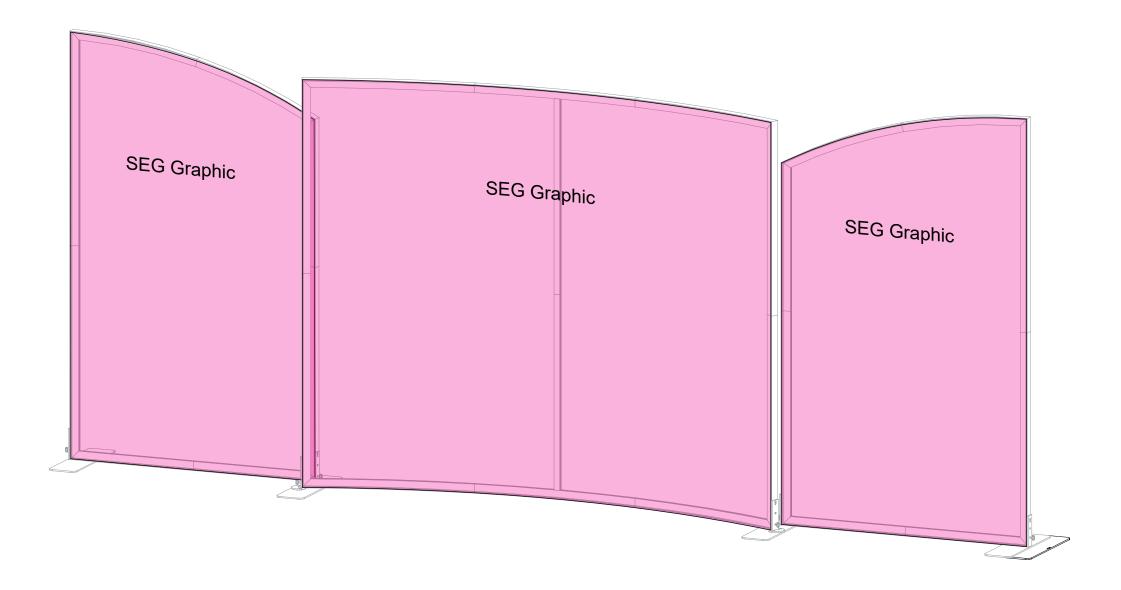

Backwall Attachments Order #XXXXX

* Workstation Bracket Attachment

Hook the Mounting Bracket over the vertical extrusion.

Mounting


Bracket




© 2023

Slide bracket forward, then down onto V4 connector.

> V4 connectors stay permanently attached to vertical extrusion.



Tighten thumb screws to secure connection to inside of frame.




Steps:

Workstation

Graphic

- 1) Attach Workstation Mounting Bracket to backwall vertical as shown. See Workstation Bracket Attachment detail.
- 2) Assemble Workstation legs & counter top to bracket. See Workstation Assembly detail.
- 3) Affix Graphics to front of workstation assemblies, using Velcro.
- 4) Attach Lights to top of backwall as shown. See Light Attachment detail.

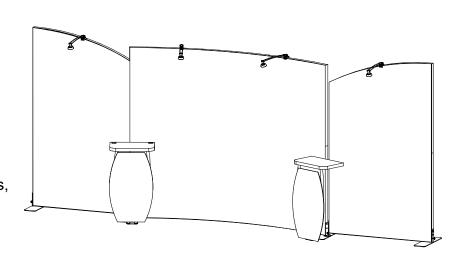

When assembled

Light

Workstation Assembly

0


 \circ


0

- 1) Attach threaded studs on underside of Counter Top to Counter Legs; secure with wing nuts.
- 2) Connect Counter Top to Mounting Bracket, using wing nuts.


Counter Top


UNDERSIDE VIEW

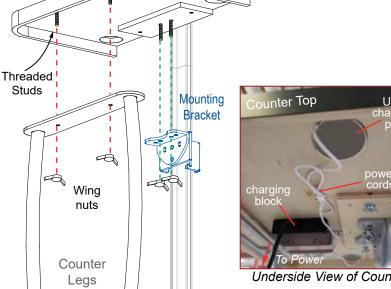



wireless chargers. Keep cords attached to underside of counter top.




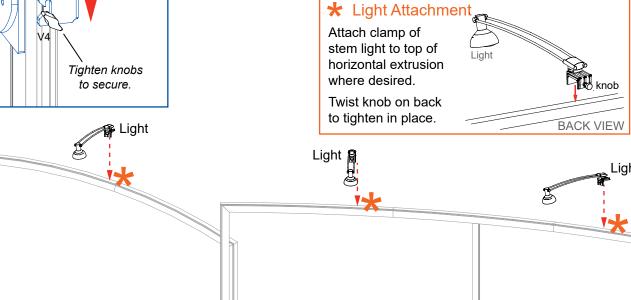



Workstation


Order #XXXXX Backwall Attachments (cont'd)

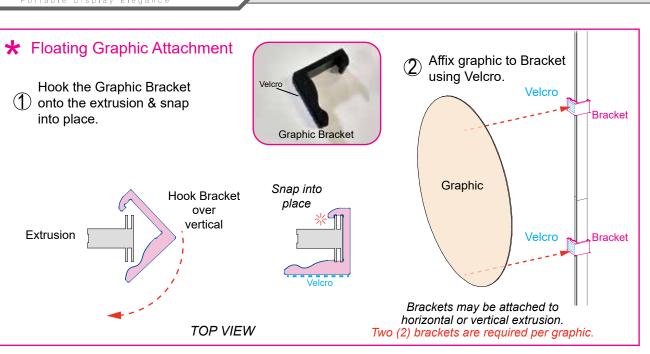


© 2023

Steps:

1) Attach Floating Graphic to backwall using brackets. See Floating Graphic Attachment detail.

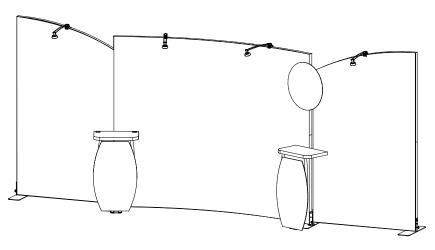

When assembled

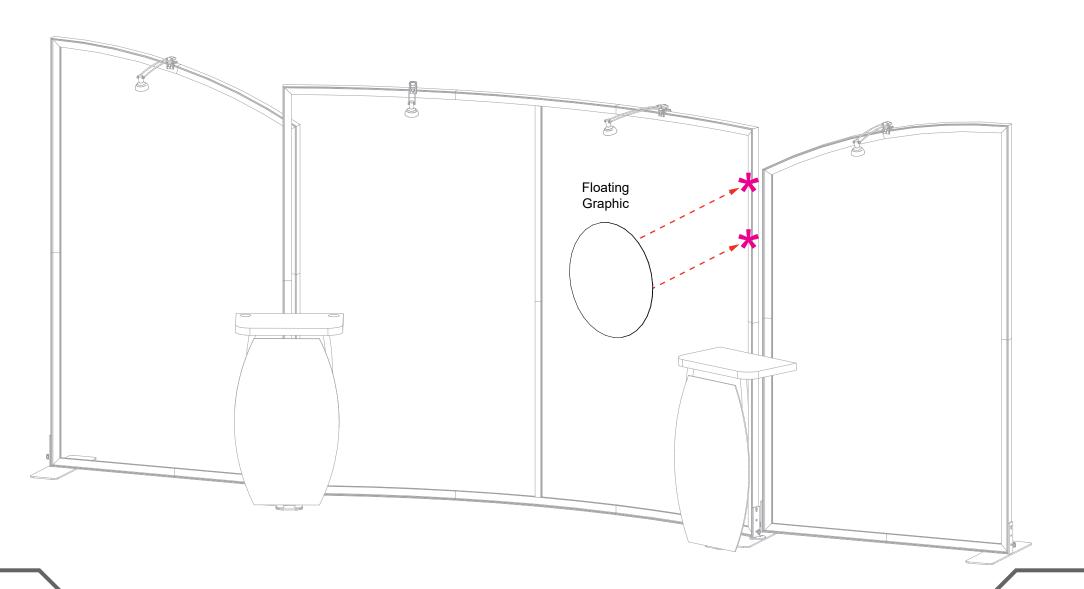

Order #XXXXX Backwall Attachments (cont'd)


Steps:

1) Attach Monitor Mount to backwall vertical.

See Monitor Mount Attachment detail.




© 2023



Slide bracket forward, then down onto V4 connector.

V4 connectors stay permanently attached to vertical extrusion.




Completed Assembly



Slide down onto V4 connector

Tighten knobs to secure.

Monitor Mount back piece



Bracket


SIDE VIEW



to Bracket.



Slide monitor mount into

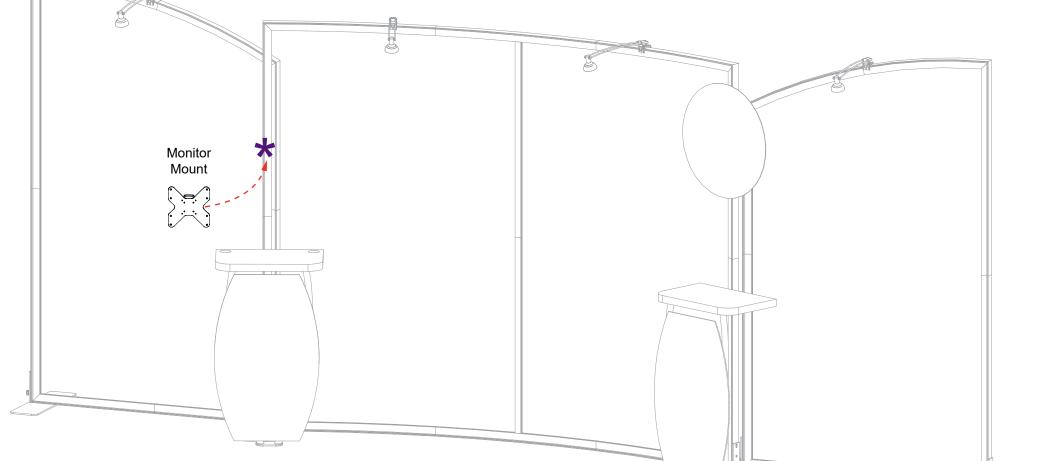


Steps:


1) Use screw caps to secure side panels to front & back panels.

© 2023


- 2) Connect shelf supports with Velcro inside of panels, then place shelf on top of supports.
- 3) Attach Counter Top to assembled pedestal base. See Counter Top Attachment detail.

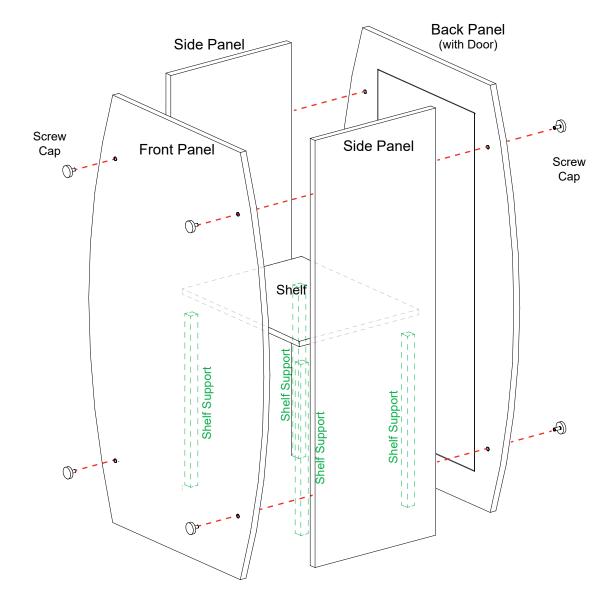

Pedestal Base Assembly

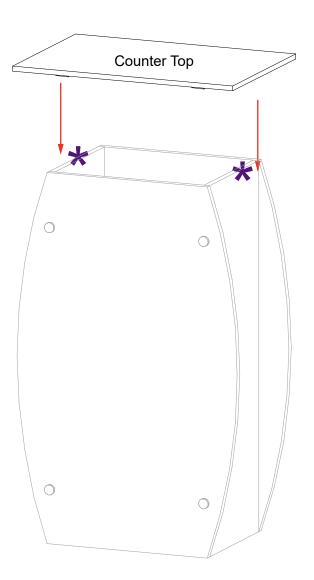

Pedestal Top Attachment

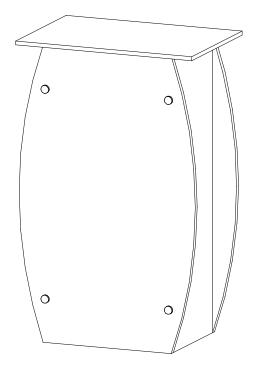

When assembled

