


GO LIGHTBOX 11196

PIXLIP®

Data sheet

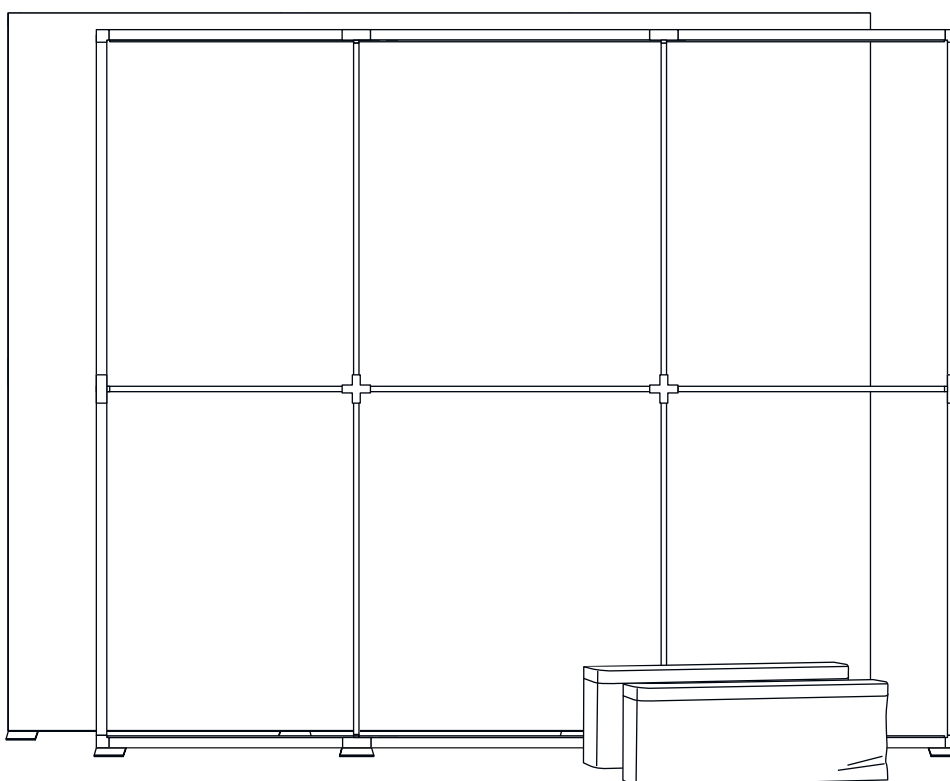

PIXLIP GO®

GO LIGHTBOX 11196

W × H × D	111 × 96 × 6 in	
Item NO.	#156030	
Package content*	2 × Bag 4 × 35 in profile with LED Module 2 × 29 in profile with LED Module 4 × 44 in profile 4 × Corner connector 4 × Base plate 4 × Click system strut 47 in 2 × Strut 38 in 1 × Strut 33 in 2 × Strut cross 3 × Extension cable 6 × Strut holder 1 × GO Connector Set 3 × Power supply 120 W-24 V 3 × Device plug USA 3 × Y-cable	
Frame	Material Color Certifications	ABS plastic RAL 9010, pure white CE Certification UL Certification Flame retardant rated V0 UV protection
GO LED module 29	Dimensions LEDs Luminous flux Color temperature Lifespan Power Input Certifications	29 x 2 x 1 in 24 pcs / module 2,400 lm / module Daylight white, approx. 7,500 K ≈ 50.000 h 24 W 24 V CE Certification UL Certification Flame retardant rated V0
GO LED module 35	Dimensions LEDs Luminous flux Color temperature Lifespan Power Input Certifications	35 x 2 x 1 in 30 pcs / module 3,000 lm / module Daylight white, approx. 7,500 K ≈ 50.000 h 30 W 24 V CE Certification UL Certification Flame retardant rated V0
GO Power Supply	Output Input Certifications	24 V, 2.5 A, 120 W Max. 100 V – 250 VAC, 50 / 60 Hz, 1.4 A CE Certification UL Certification
Shipping weight	Packet 1 = 35 lb Packet 2 = 27 lb	
Pack dimensions	Packet 1 = 47 x 8 x 17 in Packet 2 = 42 x 8 x 17 in	
Pack unit	2	

* All LIGHTBOX products do not include prints.