


GO LIGHTBOX 11796

PIXLIP®

Data sheet

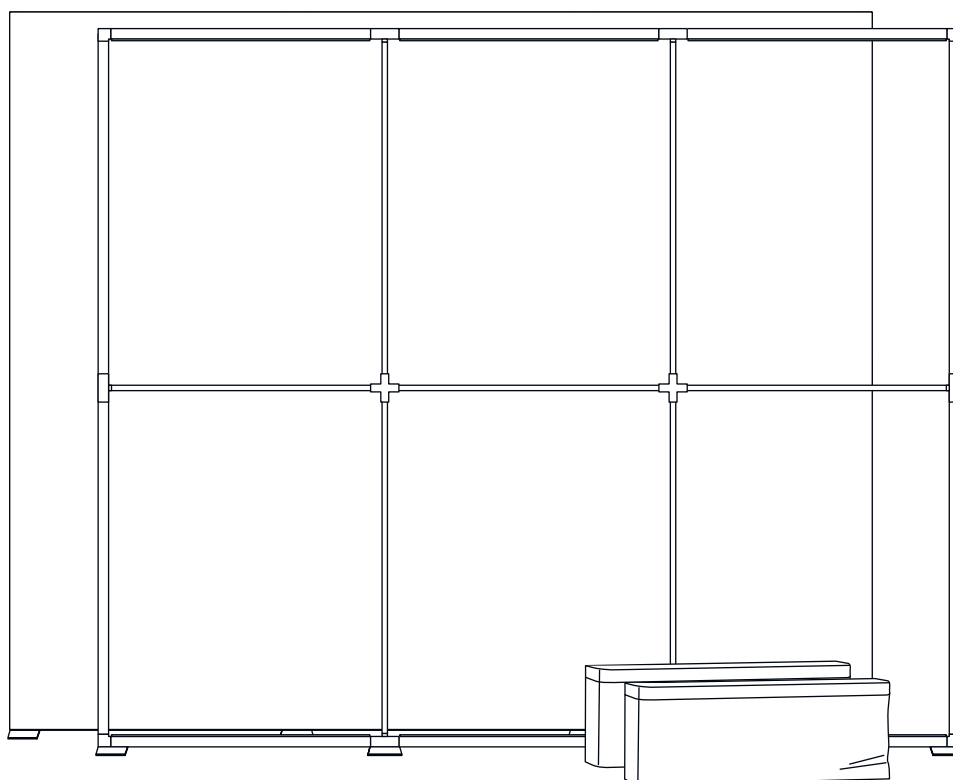

PIXLIP GO®

GO LIGHTBOX 11796

W × H × D	117 × 96 × 6 in	
Item NO.	#156029	
Package content*	2 × Bag 6 × 35 in profile with LED Module 4 × 44 in profile 4 × Corner connector 4 × Base plate 4 × Click system strut 47 in 3 × Strut 38 in 2 × Strut cross 3 × Extension cable 6 × Strut holder 1 × GO Connector Set 3 × Power supply 120 W-24 V 3 × Device plug USA 3 × Y-cable	
Frame	Material Color Certifications	ABS plastic RAL 9010, pure white CE Certification UL Certification Flame retardant rated V0 UV protection
GO LED module	Dimensions LEDs Luminous flux Color temperature Lifespan Power Input Certifications Safety	35 x 2 x 1 in 30 pcs / module 3,000 lm / module Daylight white, approx. 7,500 K ≈ 50.000 h 30 W 24 V CE Certification UL Certification Flame retardant rated V0 IP60
GO Power Supply	Output Input Certifications Safety	24 V, 2.5 A, 120 W Max. 100 V – 250 VAC, 50 / 60 Hz, 1.4 A CE Certification UL Certification IP22
Shipping weight	Packet 1 = 35 lb Packet 2 = 27 lb	
Pack dimensions	Packet 1 = 47 x 8 x 17 in Packet 2 = 42 x 8 x 17 in	
Pack unit	2	

* All LIGHTBOX products do not include prints.