


GO LIGHTBOX 3996

PIXLIP®

Data sheet

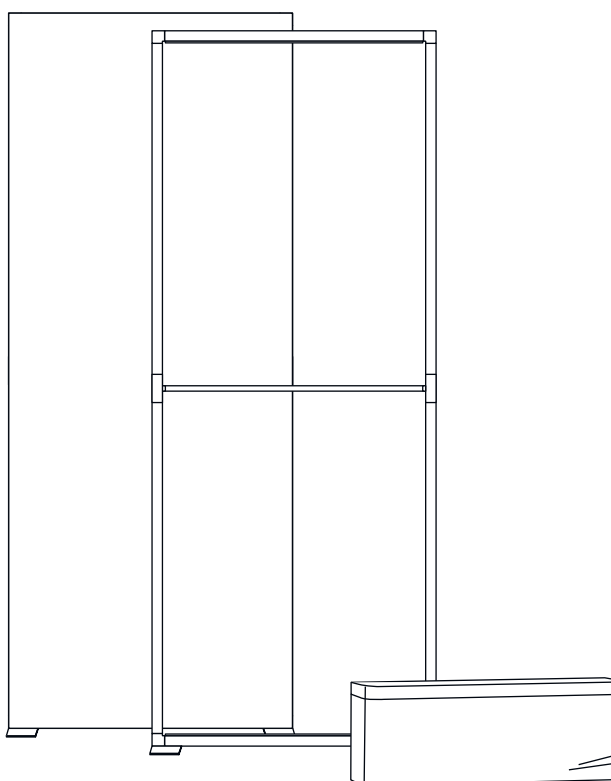

PIXLIP GO®

GO LIGHTBOX 3996

W × H × D	39 x 96 x 6 in	
Item NO.	#156026	
Package content*	2 × 35 in Profile whit LED Module 4 × 44 in Profile 4 × Corner angle 1 × Strut 38 in 2 × Strut holder 2 × Base plate 1 × Bag 1 × GO Connector Set 1 × Power supply 120 W-24V 1 × Device plug USA 1 × Y-cable	
Frame	Material Color Certifications	ABS plastic RAL 9010, pure white CE Certification UL Certification Flame retardant rated V0 UV protection
GO LED module	Dimensions LEDs Luminous flux Color temperature Lifespan Power Input Certifications Safety	35 x 2 x 1 in 15 pcs / module 3,800 lm / module Daylight white, approx. 6,500 K ≈ 50.000 h 45 W 24 V CE Certification UL Certification Flame retardant rated V0 IP22
GO Power Supply	Output Input Certifications Safety	24 V, 2.5 A, 120 W Max. 100 V – 250 VAC, 50 / 60 Hz, 1.4 A CE Certification UL Certification IP22
Shipping weight	71 lb	
Pack dimensions	47 × 8 × 17 in	
Pack unit	1	

* All LIGHTBOX products do not include prints.