


GO LIGHTBOX 7896

PIXLIP®

Data sheet

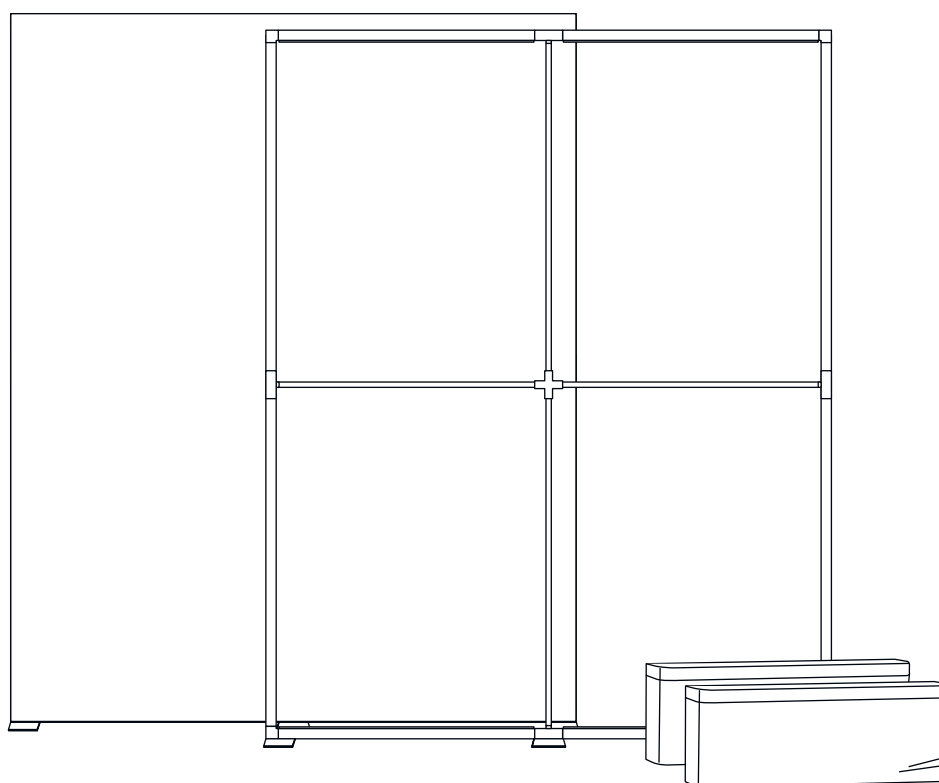

PIXLIP GO®

GO LIGHTBOX 7896

W × H × D	78 × 96 × 6 in	
Item NO.	#156027	
Package content*	4 × 35 in profile with LED Module 4 × 44 in profile 4 × Corner angle 2 × Strut 38 in 2 × Click system strut 47 in 4 × Strut holder 1 × Cross connector 3 × Base plate 2 × Bag 1 × GO Connector Set 2 × Power supply 120 W-24 V 2 × Device plug USA 2 × Y-cable 1 × Extension cable	
Frame	Material Color Certifications	ABS plastic RAL 9010, pure white CE Certification UL Certification Flame retardant rated V0 UV protection
GO LED module	Dimensions LEDs Luminous flux Color temperature Lifespan Power Input Certifications Safety	35 x 2 x 1 in 15 pcs / module 3,800 lm / module Daylight white, approx. 6,500 K ≈ 50.000 h 45 W 24 V CE Certification UL Certification Flame retardant rated V0 IP22
GO Power Supply	Output Input Certifications Safety	24 V, 2.5 A, 120 W Max. 100 V – 250 VAC, 50 / 60 Hz, 1.4 A CE Certification UL Certification IP22
Shipping weight	Packet 1 = 25 lb Packet 2 = 26 lb	
Pack dimensions	Packet 1 = 47 x 8 x 17 in Packet 2 = 42 x 8 x 17 in	
Pack unit	2	

* All LIGHTBOX products do not include prints.