


**Steps:**

- 1) Attach base to post, using bolt.
- 2) Attach plate to top of post, using screw.  
*NOTE: Plate must rotate left and right before installing clamshell.*
- 3) Attach clamshell to plate, using hex nuts.
- 4) Connect graphics to A10 clamps. See [A10 Clamp](#) detail.
- 5) Insert iPad into clamshell, then feed cords through holes.  
See [Cord Management for iPad](#) details.

**Cord Management for iPad**

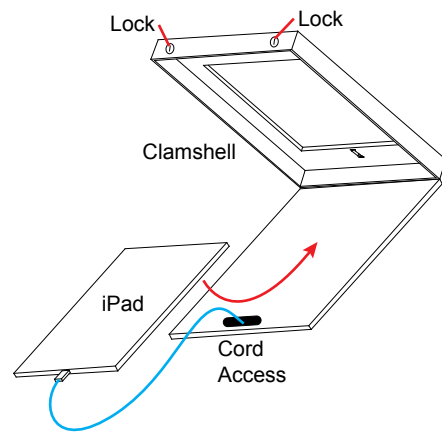


Attach iPad cord to supplied USB extension cord. Feed USB cord through top hole of post, then out bottom hole of post. Connect to power.


**A10 Clamp**

- 1) Slide connector of clamp into extrusion groove.
- 2) Tighten set screw when A10 is in desired location.
- 3) Insert wing into clamp.
- 4) Tighten knob on clamp to secure wing in place.


**Optional Cover for Home Button**

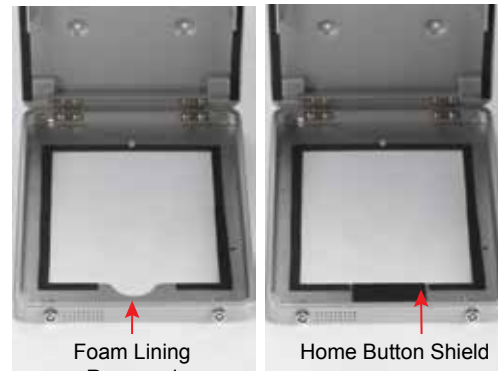

- 1) Remove foam lining from inside bottom of clamshell.
  - 2) Attach home button shield with double-sided tape to inside of clamshell, keeping top of shield flush with clamshell opening.
- NOTE: This is a permanent fix and can't be easily removed.*

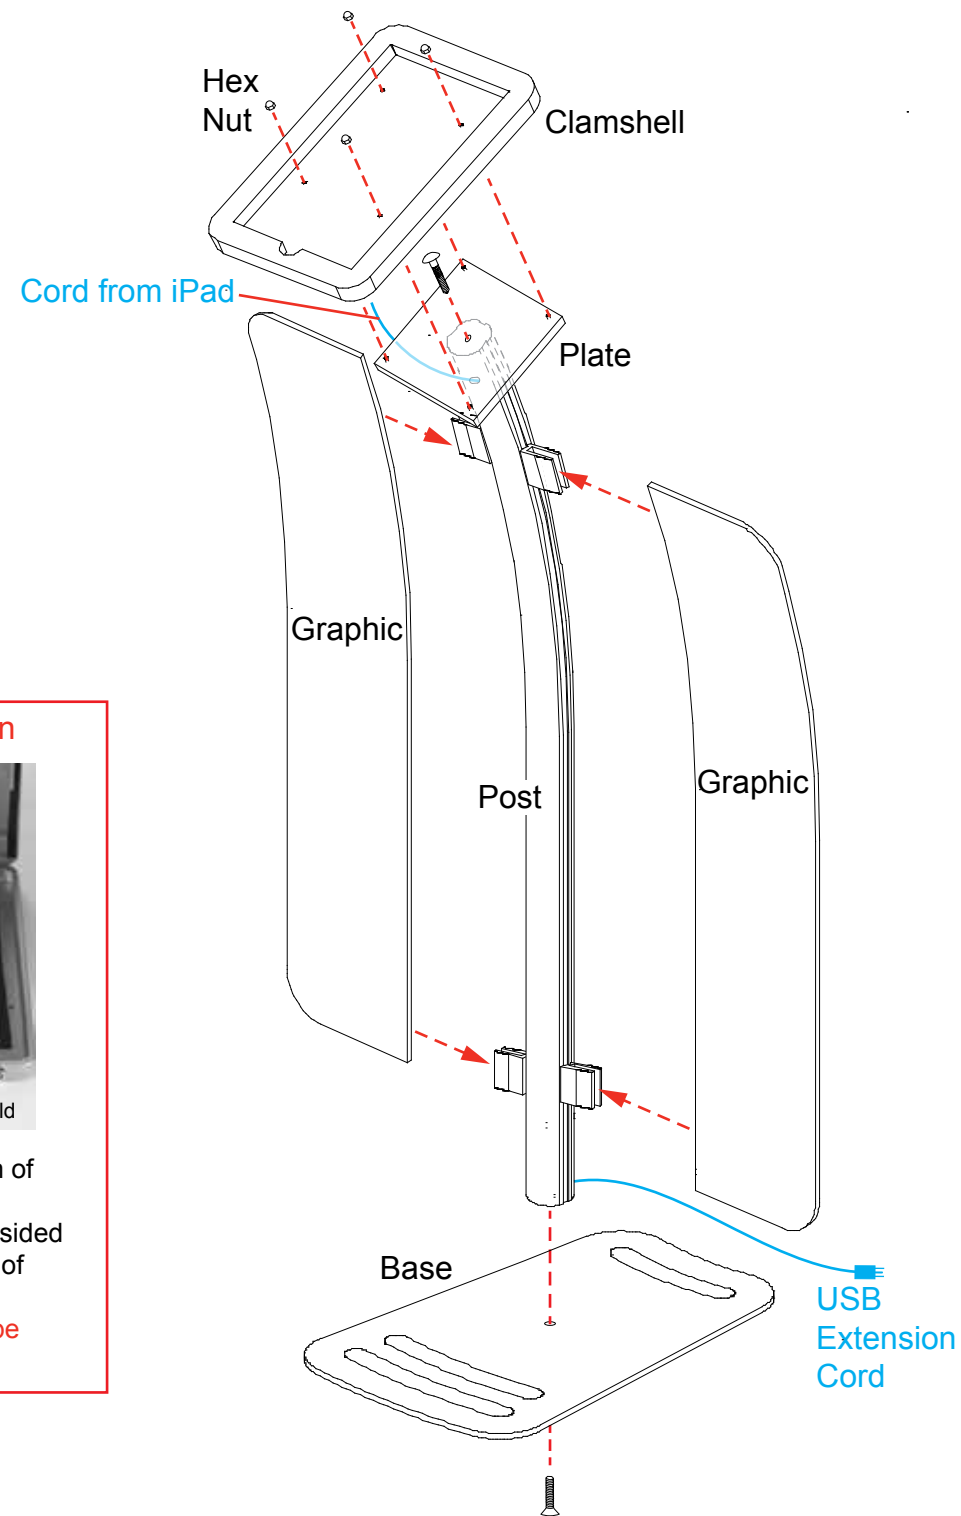

Rotate clamshell to turn iPad from portrait to landscape orientation.

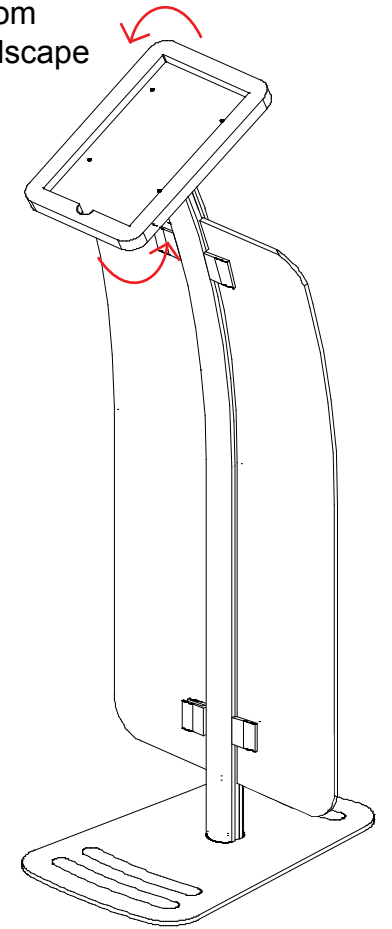

**Completed Kiosk Assembly**

**SETUP INSTRUCTIONS**

## General Setup Instructions


- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

## Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure.  
**Heat and UV exposure will warp and fade components.**
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

## Disassembly


- For loss prevention, tighten all set screws and locks during disassembly.

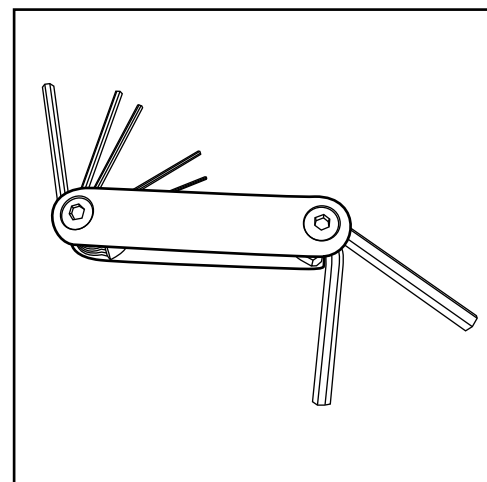


Hex Tool - Essential for Assembly

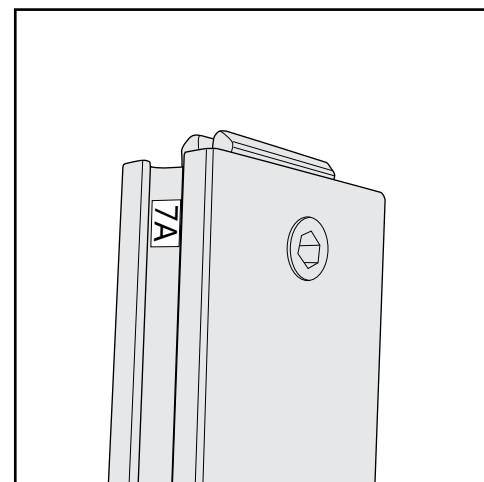


Part Identification - Numbering

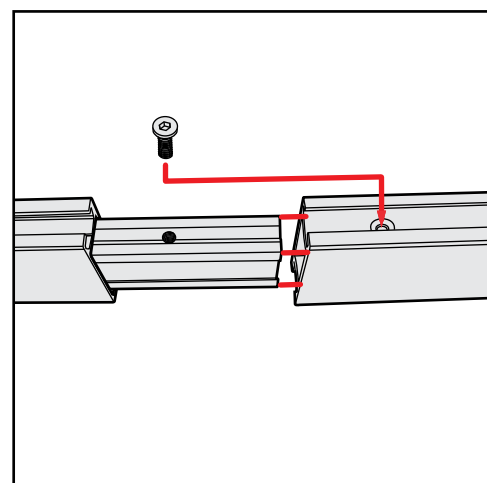


Spline Connection

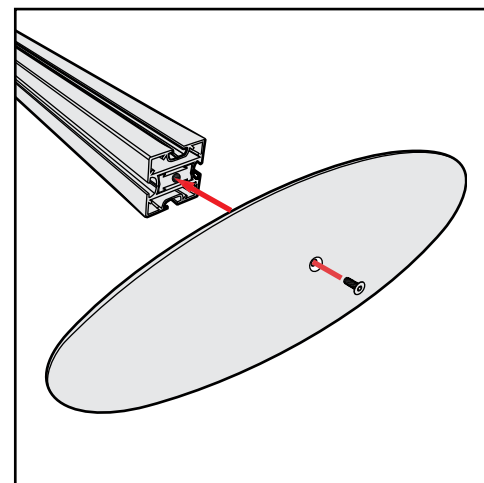

Base Plate &amp; Extrusion Connection

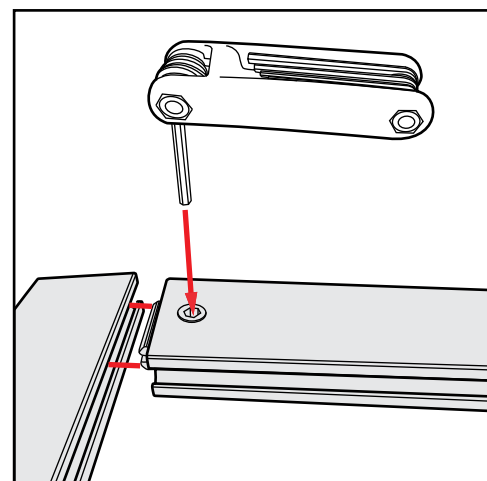

Extrusion &amp; Lock Connection

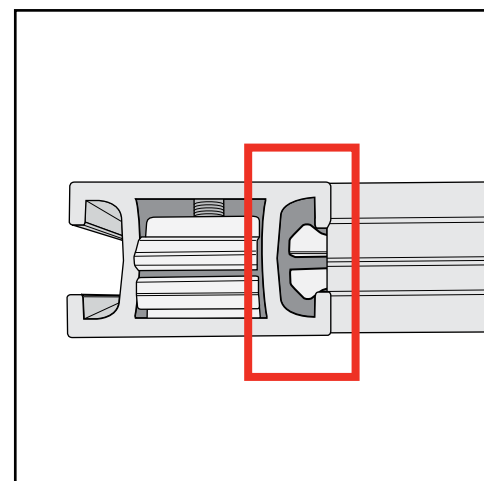

Engaged Lock



# WARNING



DO NOT USE POWER TOOLS



LADDERS OR LIFTS  
MAY BE REQUIRED



ALL CONNECTIONS MUST  
BE TIGHTLY SECURED