




SET-UP:
GRAPHIC COMES ATTACHED




Remove unit from rolling bag. 1




Stretch frame to size. Make sure webbing is not wrapped around purple locking arms. 2




Pull frame outward and align purple locking arms. 3



Snap all purple locking arms into place. 4




Once unit is locked, lift frame into place. *Graphic ships pre-attached to frame 5




Unit is complete 6

TO ATTACH END CAPS



Pull end caps down to corner of frame and attach to hook and loop fastener on grey hubs. Repeat for each corner. 7



Repeat on opposite side. 8



Lift frame into place. Unit is complete. 9


ATTACH STABILIZER FEET TO
FRAMES 3 QUADS HIGH



After applying graphic, flip Hopup on its side to access bottom hubs. 1



Start with the largest end of the opening; Slide stabilizer foot over both hubs. Feet will fit snugly over hubs. 2




Move to other hubs on the same side of the frame; slide second foot over hubs. 3




Once finished, flip frame right side up. Unit is complete. 4

TO ATTACH LIGHTS




Slide light onto light base on top of frame. 1


TO COLLAPSE




To collapse unit, first remove end cap graphics on both sides and fold onto top of frame. 1




Unlock all purple locking arms.
*Note: for 5x3 size, release locking arms from outside perimeter frame to the inside. 2



Once all arms are unlocked, slowly push frame inward to collapse. 3



Continue to collapse frame, making sure graphic and webbing do not entangle with purple locking arms. 4



Store unit into rolling bag. Be sure bag straps do not wrap around purple locking arms. 5

to ensure quality, please note:




If the webbing is wrapped around the purple locking arm, the arm can snap off when opening the unit.




When packing unit in the bag, ensure that the strap is not partially wrapped around an arm. If it is, the arm will snap when pulled out of the bag.




Do not use the purple locking arm to lift unit. ALWAYS lift by the frame.




To detach the female arm, remove the screw, steel plate and hook and loop fastener webbing. Pull the arm off the hub.




Attach the female arm by popping it into the hub. Fasten the screw through the steel plate hole and the hook and loop fastener webbing tapping into the female arm.



To detach the male arm, pull the arm off the hub.



Simply pop in the male arm into the hub.

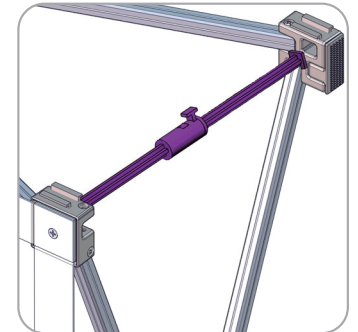

Both arms should align to snap lock together.